

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 160 465 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
05.12.2001 Bulletin 2001/49

(51) Int Cl.7: **F16B 17/00, F16B 7/04**

(21) Application number: 01112695.0

(22) Date of filing: 25.05.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Johnson, Mark Nicholas**  
Tollerton, North Yorkshire YO61 2HB (GB)

(74) Representative: **Wood, Graham**  
Bailey Walsh & Co,  
5 York Place  
Leeds LS1 2SD (GB)


(30) Priority: 25.05.2000 GB 0012653

(71) Applicant: **Johnson, Mark Nicholas**  
Tollerton, North Yorkshire YO61 2HB (GB)

(54) **Mechanical joint, method for forming same and item incorporating same**

(57) The invention relates to the provision of a mechanical joint, a method for forming the same and items made incorporating the joint. The joint includes a first member (2) with an opening (6) which is in an initially sufficiently wide condition to receive therein a second member, insert (16) or former. When the same is positioned correctly the opening is moved to a condition

whereby the insert (16), second member or former is trapped in the opening (6). By this method the second and first members are connected either directly or via connection to the insert or former. Items including a plurality of said joints at the required locations can be made which are strong and sturdy and with relatively straightforward manufacturing requirements.

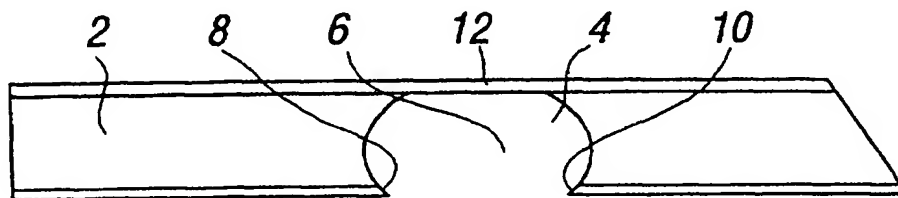

**FIG. 1A**

**EP 1 160 465 A2**

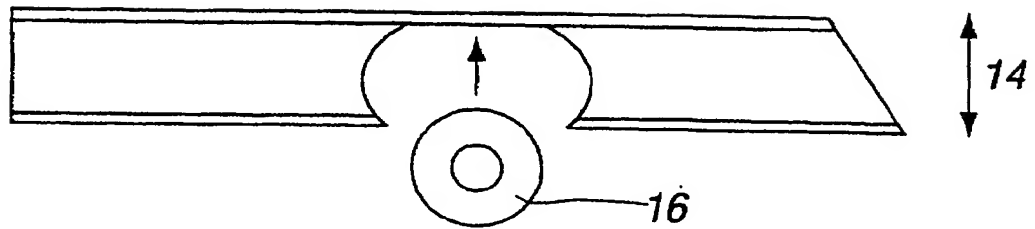


FIG. 1B

## Description

[0001] The invention to which this application relates is a mechanical joint which can be used in many possible areas such as, for example, in construction of furniture, exhibition stands, staging and the like.

[0002] Conventionally, when an item such as an item of furniture or staging is constructed, at various intervals such as at the corners of the item a series of members are joined together typically by welding. For example, the ends of an end member and side member are abutted against a leg member and welded thereto to form part of the frame construction. In other instances, the leg member can be provided with slots or other engagement means to allow matching engagement means in the end and side members to be engaged therewith but again, typically, some form of welding or other attachment is also provided to ensure that the members stay in the correct position. The use of welding to join the members together means that once the item has been formed, finishing operations are required to reduce the visible impact of the join and smooth the surfaces of the same. However, it is still commonly the case that the attachment technique used is clearly visible and this can detract from the aesthetic appearance of the article and, furthermore, can also restrict the form and construction of the articles.

[0003] The aim of the present invention is to provide a mechanical joint which can be used without the need for visible attachment means thereby improving the aesthetic appearance of the articles formed using this type of joint.

[0004] In a first aspect of the invention there is provided a mechanical joint for use in the construction of an article, said joint comprising a first member for connection with a second member, and wherein said first member is provided with at least one aperture having an opening defined by first and second edges, said aperture provided for the reception of the second member, or an insert to which the second member can be attached, and to form the joint, the first and/or second edges of the opening are moved to engage the second member or insert within the aperture.

[0005] In one embodiment the first member is provided with a series of apertures formed at spaced intervals and each of said apertures is provided for the formation of a mechanical joint in accordance with the invention.

[0006] Typically the second member lies in a plane substantially perpendicular to the plane of the longitudinal axis of the first member.

[0007] In one embodiment, the first member is provided in an initial condition in an elongate form and the movement of the first and second edges of the opening of the aperture is about a pivotal axis located in the aperture or adjacent thereto so that the first member, when the joint is formed has relatively angled first and second portions adjacent the joint.

[0008] In one embodiment, the aperture is formed so

as to extend from one side of the member across the majority of the member to the opposite side leaving a band of material at the opposite side.

[0009] In one embodiment, the said first member includes engagement means at intervals, or along the length thereof, to allow the engagement of a further component such as, for example, a table top, decking or the like.

[0010] In a further aspect of the invention there is provided a method of forming a mechanical joint, said method comprising taking a first elongate member, forming an aperture depending from one edge of said member, positioning a member or insert in the aperture and then moving at least one portion of the member to move first and second edges of the opening into the aperture towards one another to a degree which is sufficient to prevent the insert or member from passing through the opening.

[0011] In one embodiment the first and second edges are respectively moved so as to substantially close the opening and hence retain the member or insert in position in the aperture. In one arrangement the opening may be completely closed by the provision of a closing member and/or weld material.

[0012] In one embodiment an insert is provided in the aperture and has upper and/or lower collars formations which protrude above or below the first member. In one form the member positioned in the aperture is a former and is subsequently moved out of the aperture and replaced by an insert which can be held in position or alternatively the member is a second member which is attached via the mechanical joint. In an alternative embodiment, the insert is provided in the aperture and when the first member is moved, as described, the insert is in position so there is no need for a further insert or member to be provided.

[0013] If an insert is used, typically it is provided with engagement means to allow the engagement of a second member therewith.

[0014] It will therefore be appreciated that a number of these mechanical joints and a number of members can be provided to allow the formation of an item.

[0015] In one embodiment, if the item which is formed is for example a table or desk or staging or a stand, the sheet material which forms the table top or stage is formed of a particular shape and at least partially enclosed by at least one member in which the mechanical joints are to be formed. The at least one member is provided with engagement means for the sheet material. In one embodiment, in the formation of the item, the mechanical joints are formed with the sheet material in situ so that the at least one member is formed around the sheet material to take the same shape as the outline of the sheet material.

[0016] It should also be appreciated that in some instances, and dependent on the size and form of aperture in the member, the insert or second member which is to be located in the aperture may be of a size or diameter

greater than the dimensions of the member in which the aperture is formed so that the mechanical joint has a bulbous form.

[0017] In a yet further aspect of the invention there is provided a method of forming a mechanical joint, said method comprising taking a first elongate member, forming an aperture depending from one edge of said member, positioning a former in the aperture and moving at least one portion of the member to at least partially close the opening to an extent which is sufficient to prevent the former from passing through the opening.

[0018] In one embodiment the former is removed by sliding the same out of the aperture and replaced by an insert or second member which is positioned to engage in the opening and so engage a second member with the first member directly or via the insert.

[0019] In an alternative embodiment the former is an insert which is retained in position and to which the second member is connected or the former is the second member itself which is trapped in position to form the mechanical joint.

[0020] In a further aspect of the invention there is provided an item formed from at least a first and second member, said item formed by engaging the second member with the first member via a mechanical joint and characterised in that said mechanical joint is formed with the first member including an opening defined therein for the reception of the second member or means to which the second member can be attached, said edges defining the opening moved to trap the means or second member in the opening and thereby form the item of furniture. In one embodiment the item is formed from a series of selectively engaged members, at least one of said engagements made via a mechanical joint as herein described.

[0021] Specific embodiments of the invention will now be described with reference to the accompanying drawings, wherein:-

Figures 1A-H illustrate the method used in the formation of a joint in one embodiment according to the invention;

Figures 2A-B illustrate an embodiment of the joint with a second member attached therewith;

Figures 3A-G illustrate further arrangements of location means for a second member;

Figures 4A-B illustrate one use of a joint arrangement;

Figures 5A-C illustrate embodiments of some articles manufactured using the joint of the current invention;

Figures 6A -C illustrate one form of insert in accordance with the invention;

Figure 7 illustrates a further embodiment of joint in accordance with the invention; and

Figure 8 illustrates a yet further embodiment of insert for use with the mechanical joint of the invention.

[0022] Referring firstly to Figures 1A-H, there is illustrated a method of forming a joint in accordance with the current invention. There is provided in Figure 1A a member 2 which can be tubular and typically of square or rectangular cross-section or may alternatively be of C-section or any appropriate section to suit the particular use. The material used can also be of any particular form and to suit particular manufacturing requirements and/or finishing appearances. There is formed in the member 2, which is shown in plan, an aperture 4 which has an opening 6 defined by first and second edges 8, 10. The aperture is formed so as to leave a band 12 of material of the member at the edge opposite the opening as illustrated.

[0023] Figure 1B illustrates how an insert as shown, former piece or the second member to be attached thereto, is positioned in the aperture 4. In the embodiment shown the insert has a smaller diameter than the width 14 of the member 2 but it should be appreciated that the diameter of the insert could be greater than the width 14 thereby forming a bulbous joint. With the insert 16 in position as shown in Figure 1C, the edges 8 and 10 are, in effect, wrapped around the insert 16 as is illustrated in Figure 1D by the movement of the portions 2A, 2B of the member 2, illustrated by the arrows 20, 22 respectively. It will be seen with reference to Figures 1D through to G that the continued movement of the members 2A, 2B brings the edges 8 and 10 into a position in which they are adjacent one another and in which the walls of the aperture 4 wrap round and take significantly the same form as the outer surface of the insert 16. It should be noted that in normal instances the shape of the aperture will be such as to allow the formation of the aperture when the steps illustrated in Figures 1A-G have been completed substantially matches the outline of the insert 16. Thus the insert 16 can no longer be removed through the opening and the mechanical joint is formed and into which a second member, not shown, can be engaged. The insert 16 includes engagement means with which the second member engages. If required, the edges 8 and 10 can be welded together as illustrated in Figure 1H to close the opening although this may not be necessary in all instances and, it will be appreciated that the position of the weld is such that it will not be readily viewable by onlookers to the article formed using joints of this type. It will therefore be appreciated that the joint formed in accordance with this invention does not require large scale welding or joining of components together and therefore the visual appearance of the joint so formed is greatly enhanced in comparison to conventional joints. Furthermore, there is no need to provide

finishing operations on the joint to improve the visual appearance of the same as is the case with conventional joints.

[0024] Figures 2A and B illustrate the provision of one embodiment of insert 16 as part of the mechanical joint. The cross sectional view in Figure 2B shows that the insert has upper and lower collars 24, 26 respectively which lie outside of the member 2 and prevent the insert from slipping through the aperture 4, and an outer wall 28 which defines an inner passage 30 which has a frustoconical portion 32. To allow the engagement of a second member 34 with the mechanical joint in this embodiment, the insert is positioned in the joint as described with Figures 1A-H and then the second member 34 is introduced into the insert as indicated by arrow 36 along with an engagement formation 38 which sits in the passage 30 of the insert 16. The engagement means 38 has an annular ring 40 which engages in an indented recess 42 in the second member 34 and thereby engages the second member in the insert via the engagement means 38 as shown. Typically, the second member can be a leg of a table, a desk, seat, shelving unit, staging or the like and in the embodiment of Figure 2A, the second member 34 is engaged with the insert 16 and passes through the joint to form a leg of a shelving system so that the member will be engaged with a number of mechanical joints at spaced intervals there-along, each of the mechanical joints being provided at the location of a shelf.

[0025] There are a number of different arrangements of inserts which can be used to suit specific requirements and Figures 3A to G illustrate various embodiments. In Figure 3A, the insert is provided with a threaded passage 48 into which a screw or other threaded engagement means 50 can be entered to engage with a member, not shown, but protruding from the base 52 of the insert. Figure 3B illustrates a split collar form of insert with which a member can be engaged by passing into the aperture 48 passing through the insert. Figure 3C utilises the provision of a grub screw 54 which can be used to engage with a second member 52 on the insert 16. Figure 3D illustrates an arrangement whereby the insert 16 is provided to locate two members 60, 62 with respect to the mechanical joint and to each other by use of matching male and female engagement means 64, 66 and collar section 68 as illustrated. Figure 3E illustrates a similar arrangement to Figure 3D with only one member 62 being located and with a capped engagement portion 70 but utilising the male and female engagement means 64, 66 in a similar manner. Figures 3F and G illustrate similar arrangements to that of Figure 3E.

[0026] It will be appreciated that a number of mechanical joints will typically be required to allow the formation of an item and it will also be appreciated that there are number of different embodiments of articles which can be formed using the mechanical joint as herein described

[0027] Figures 4A and B illustrate one form wherein a mechanical joint is formed from member 2A, 2B and the member is provided with a C section as illustrated. The mechanical joint in this arrangement is provided to be used to form a table or staging and a portion of the sheet material used to form the table top or stage 72 is illustrated wherein recessed edges 74 are provided which engage in the recess of the C section as illustrated. With the leg 76 engaged in the insert 16 as shown in Figure 4B, it will be appreciated how a number of said mechanical joints at the corners of the item are used to allow attachment of the legs and also, in conjunction with the members 2, allow the engagement of the sheet material 72 and so form the item.

[0028] Figures 5A to C illustrate alternative arrangements using mechanical joints, and Figures 5A and B illustrate how relatively unusually shaped items of furniture can be formed. Indeed, in the Figures 5A and B it is possible that the table top 72 can be provided in grooves along the inner sides of the member 2 and the member 2 formed around the shape of the table top with the joints formed at the same time as the member is shaped. Figure 5C illustrates a more conventionally shaped table and illustrates how the table top is provided to be fitted into a frame formed with mechanical joints in accordance with the invention.

[0029] Figures 6A-C illustrate a further embodiment of mechanical joint, with Figures 6B and C illustrating plan views of the mechanical joint in an open position and formed position respectively and Figure 6A illustrating the loci of the two part insert 80 formed by parts 82, 84, with apertures 86, 88 respectively. The loci diagram illustrates that the centres of the apertures 86, 88 are offset until they are pinned together and, because of this cannot move or rotate around each other to disengage. Thus, in use, the two parts 82, 84 are engaged in respective parts of the first member 90 by respective engagement means 92, 94 and lie in the opening 96 in the first member. The first member 90 is then progressively bent around as illustrated in Figure 6A to form the position shown in Figure 6C whereupon the two parts 82, 84 of the insert 80 are located such that the apertures 86, 88 overlies one another. A pin or other engagement means 89 can then be placed through the aperture to retain the insert with the second member and hence the mechanical joint in the position shown in Figure 6C.

[0030] Figure 7 illustrates a further form of mechanical joint, illustrating the same in a formed condition. In this case the first member 100 receives a profiled insert 102 in the open ends of the first member at the opening, prior to forming. The insert has an aperture 104 and once, formed a further insert is provided which engages with the first insert when in a formed condition to lock the same in the formed condition and hence form the mechanical joint.

[0031] Figure 8 illustrates an embodiment of one form of insert which is formed from two parts 110, 112, shown in elevation and section. The first part 110 is provided

to be inserted into the second part 112 as shown via the plug 114 moving into the aperture 116. In this case, the mechanical joint can be formed in accordance with the invention and an insert is formed such as that illustrated in Figures 6A-C. The insert shown in Figure 8 can then be placed into the aperture by placing the parts 110, 112, from opposing sides, into the aperture and engaging the same to complete the joint. This allows the insert to be provided of different material and/or finishes and may also allow the insert to be provided with other engagement formations for other items and the like.

## Claims

1. A mechanical joint for use in the construction of an article, said joint comprising a first member for connection with a second member, and wherein said first member is provided with at least one aperture having an opening defined by first and second edges, said aperture provided for the reception of the second member, or an insert to which the second member can be attached, and to form the joint, the first and/or second edges of the opening are moved to engage the second member or insert within the aperture.
2. A mechanical joint according to claim 1 **characterised in that** the first member is provided with a series of apertures formed at spaced intervals and each of said apertures is provided for the formation of a mechanical joint in accordance with the invention.
3. A mechanical joint according to claim 1 **characterised in that** the second member lies in a plane substantially perpendicular to the plane of the longitudinal axis of the first member.
4. A mechanical joint according to claim 1 **characterised in that** the first member is provided in an initial condition in an elongate form and the movement of the first and second edges of the opening of the aperture is about a pivotal axis located in the aperture or adjacent thereto so that the first member, when the joint is formed has relatively angled first and second portions at or adjacent to the formed joint.
5. A mechanical joint according to claim 1 **characterised in that** the aperture is formed so as to extend from one side of the member substantially across the majority of the member to the opposite side leaving a band of material at the opposite side.
6. A mechanical joint according to claim 1 **characterised in that** an insert is provided in the aperture and has upper and/or lower collars formations which protrude above or below the first member.
7. A mechanical joint according to claim **characterised in that** in one form the second member positioned in the aperture is a former and is subsequently moved out of the aperture and replaced by an insert which can be held in position.
8. A mechanical joint according to claim 1 **characterised in that** the second member is attached to an insert held within the opening.
9. A method of forming a mechanical joint, said method comprising taking a first elongate member, forming an aperture depending from one edge of said member, positioning a member or insert in the aperture and then moving at least one portion of the member to move first and second edges of the opening towards one another to a degree which is sufficient to prevent the insert or member from passing through the opening.
10. A method according to claim 9 **characterised in that** the first and second edges are respectively moved so as to substantially close the opening and hence retain the member or insert in position in the aperture.
11. A method according to claim 9 **characterised in that** the opening is completely closed by the provision of a closing member and/or weld material.
12. A method of forming a mechanical joint, said method comprising taking a first elongate member, forming an aperture depending from one edge of said member, positioning a former in the aperture and moving at least one portion of the member to at least partially close the opening to an extent which is sufficient to prevent the former from passing through the opening.
13. A method according to claim 12 **characterised in that** the former is removed by sliding the same out of the aperture and replaced by an insert or second member which is positioned to engage in the opening and so engage a second member with the first member directly or via the insert.
14. A method according to claim 12 **characterised in that** the former is an insert which is retained in position and to which the second member is connected.
15. A method according to claim 12 **characterised in that** the former is part of the second member trapped in position to form the mechanical joint.
16. An item formed from at least a first and second member, said item formed by engaging the second member with the first member via a mechanical joint

and **characterised in that** said mechanical joint is formed with the first member including an opening defined therein for the reception of the second member or means to which the second member can be attached, said edges defining the opening 5 moved to trap the means or second member in the opening and thereby form the item of furniture.

17. An item according to claim 16 **characterised in that** the item is formed from a series of selectively engaged members, at least one of said engagements made via a mechanical joint as herein described. 10

15

20

25

30

35

40

45

50

55

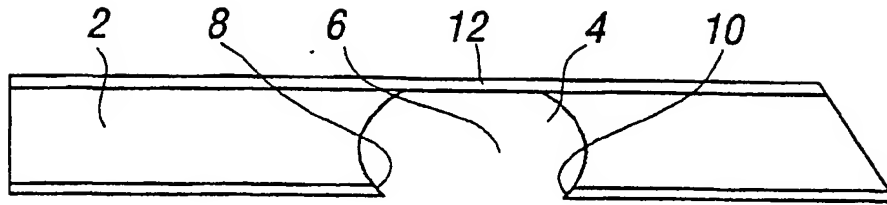


FIG. 1A

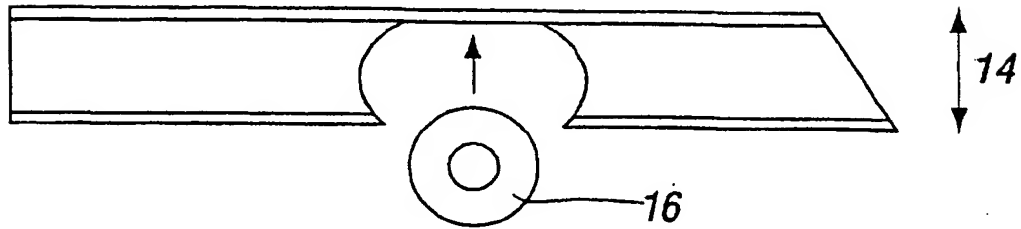


FIG. 1B

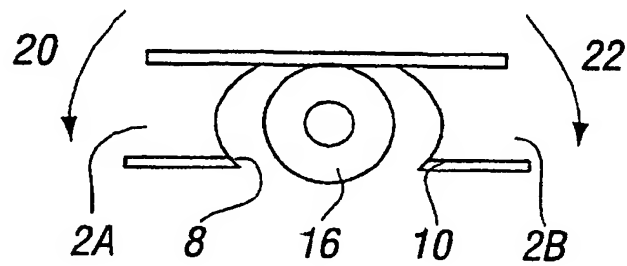


FIG. 1C

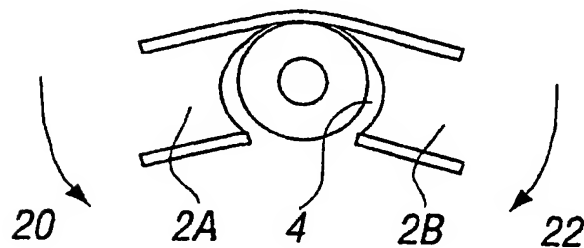


FIG. 1D



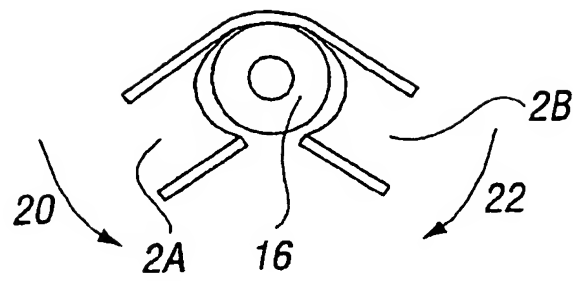


FIG. 1E

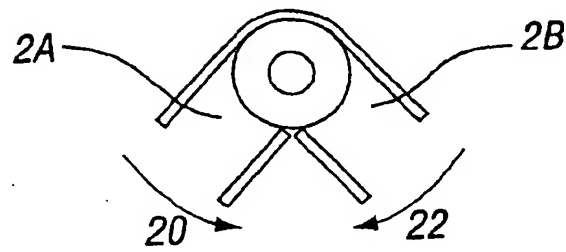


FIG. 1F

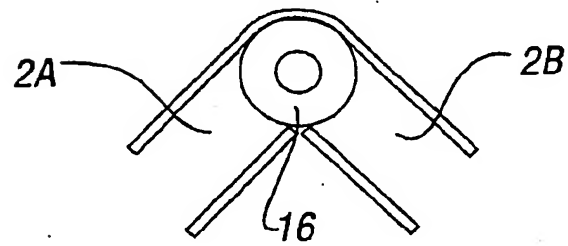


FIG. 1G

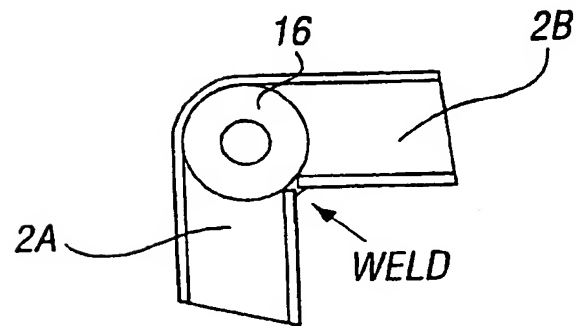


FIG. 1H

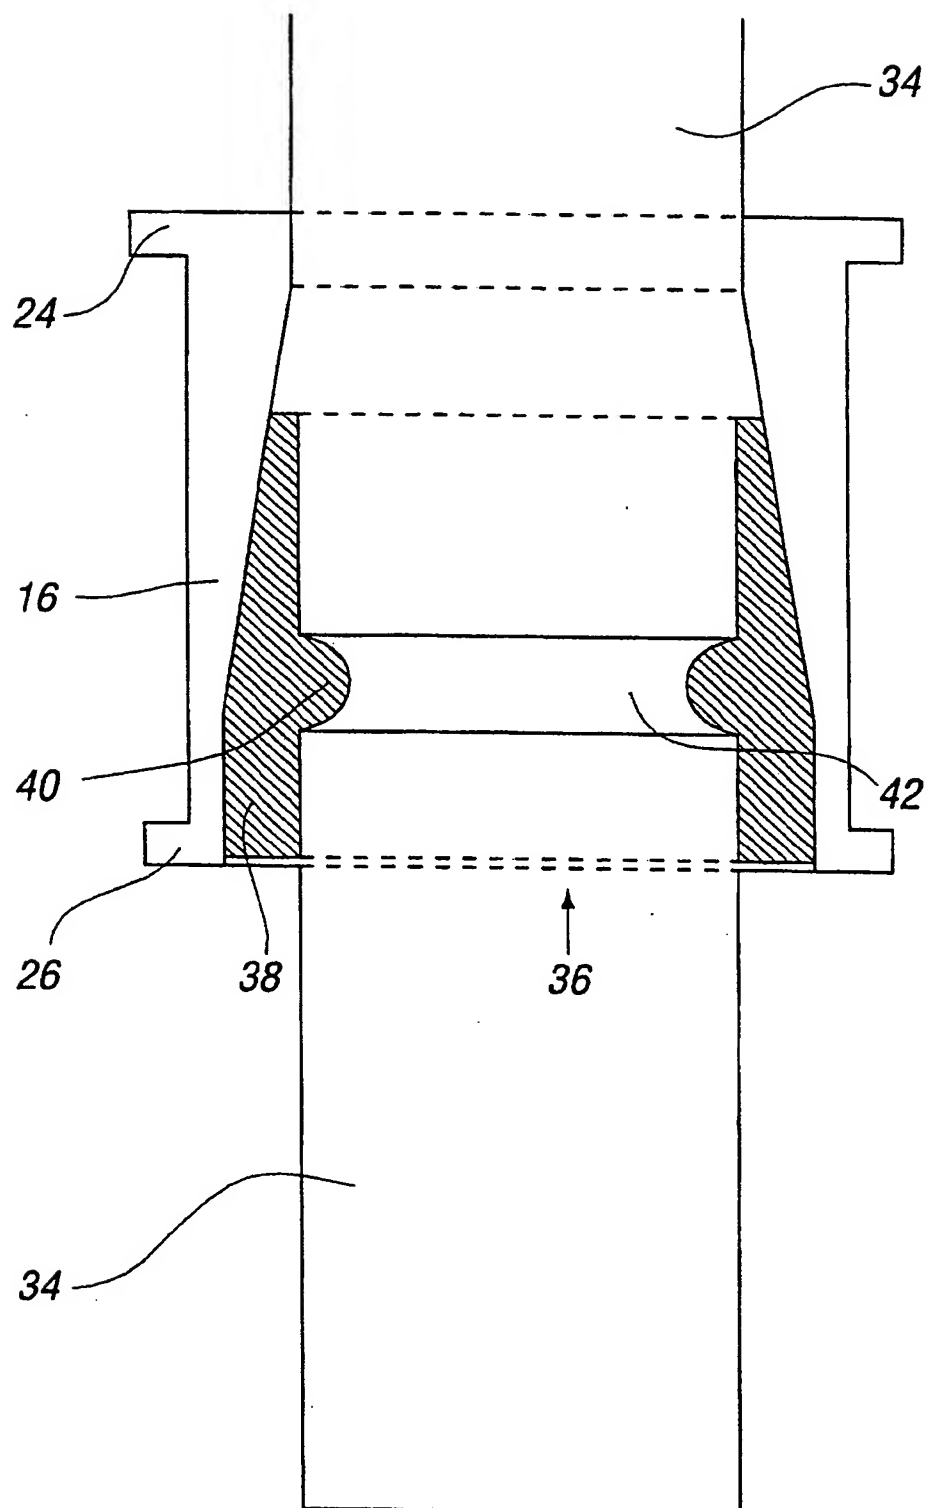
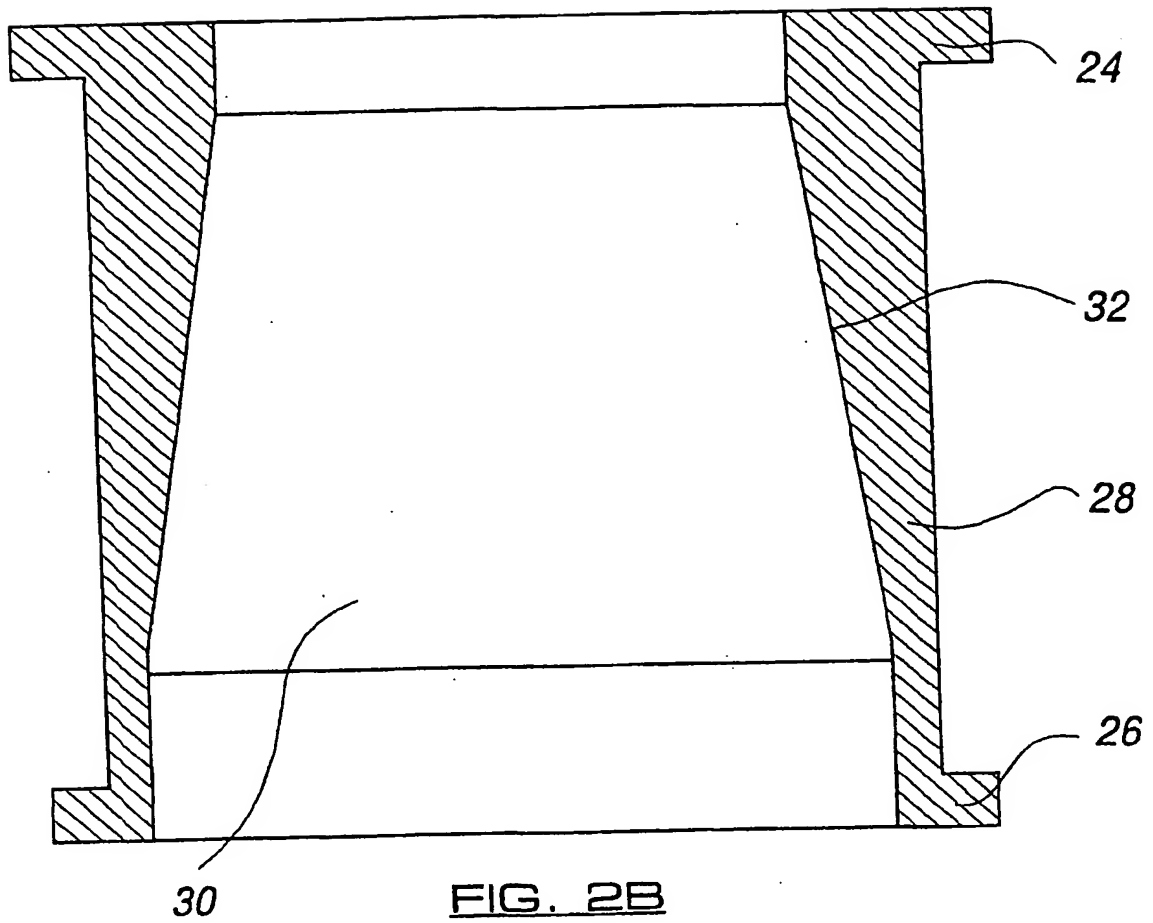
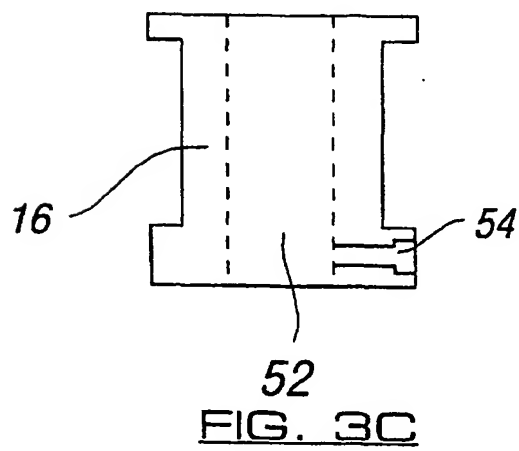
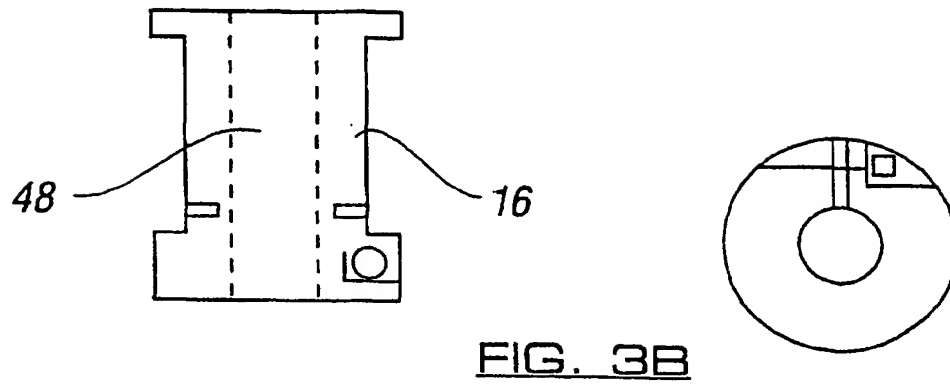
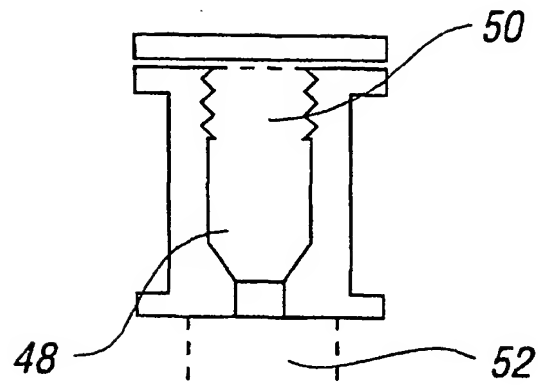


FIG. 2A





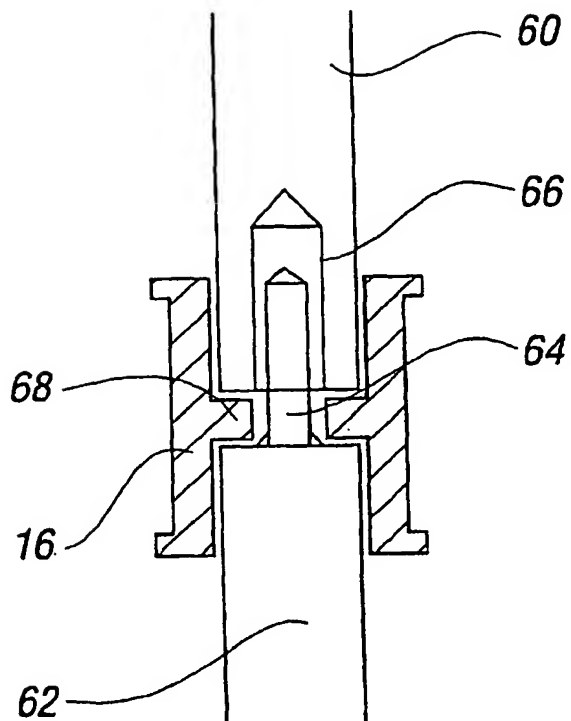


FIG. 3D

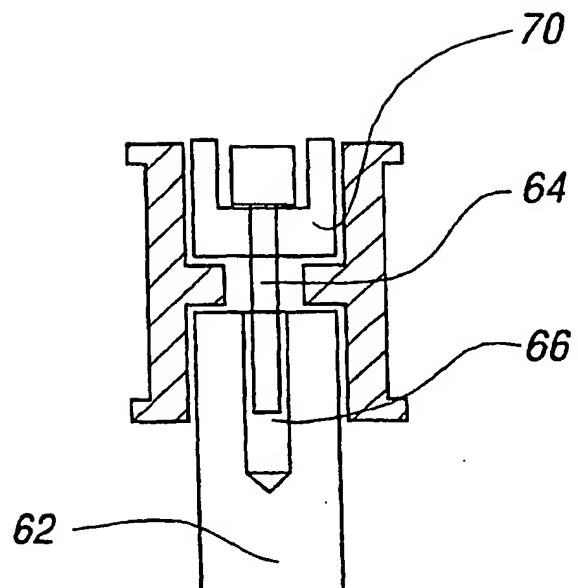


FIG. 3E

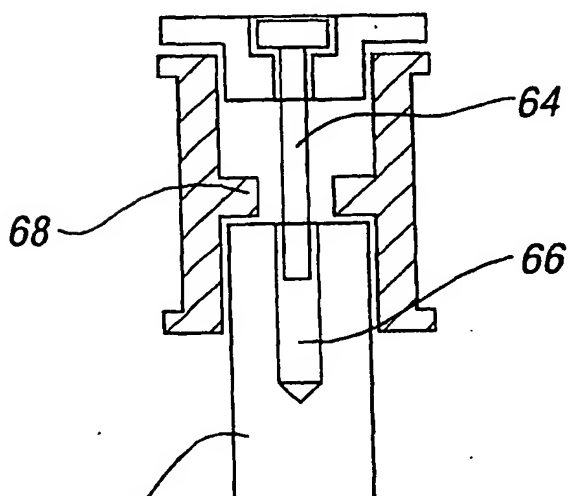


FIG. 3F

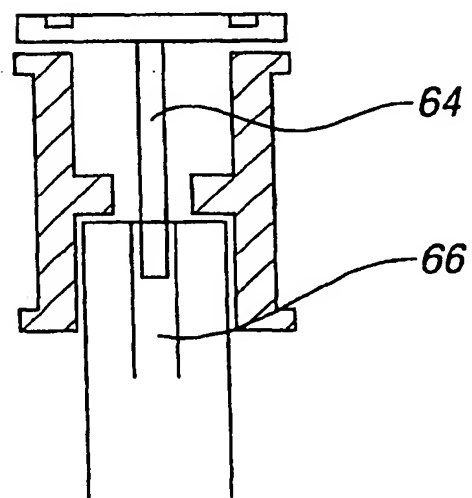
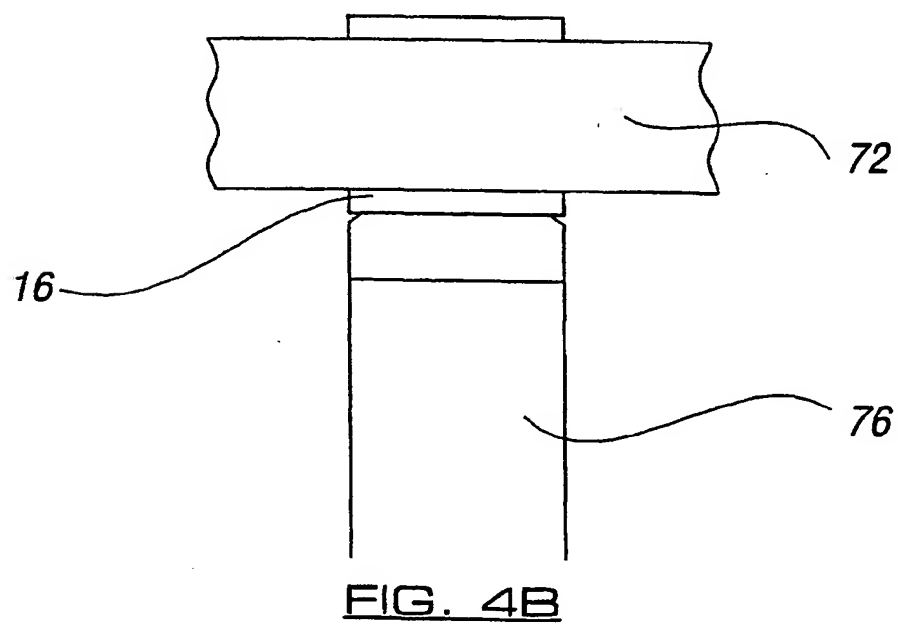
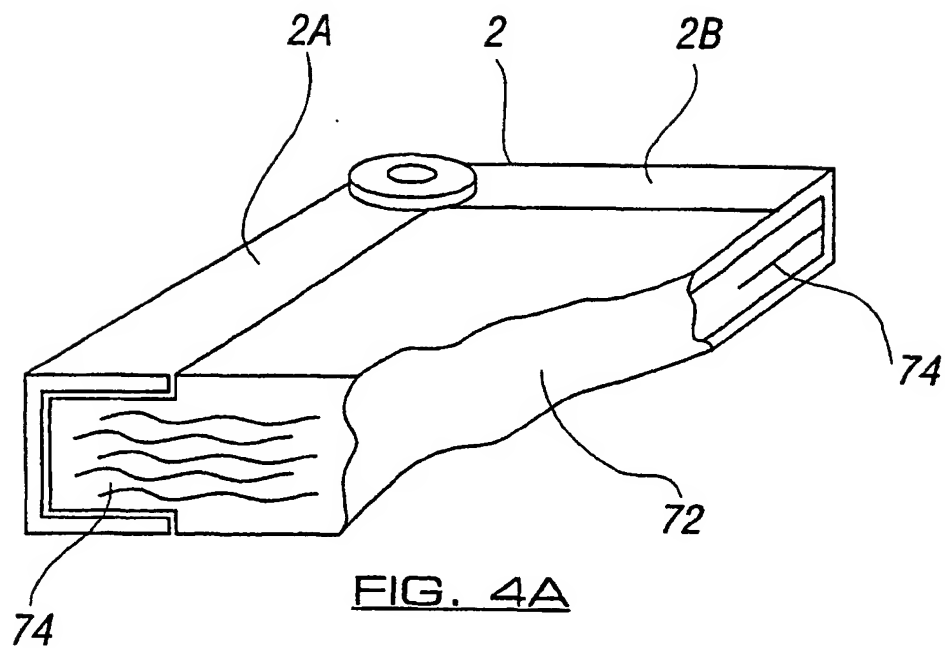
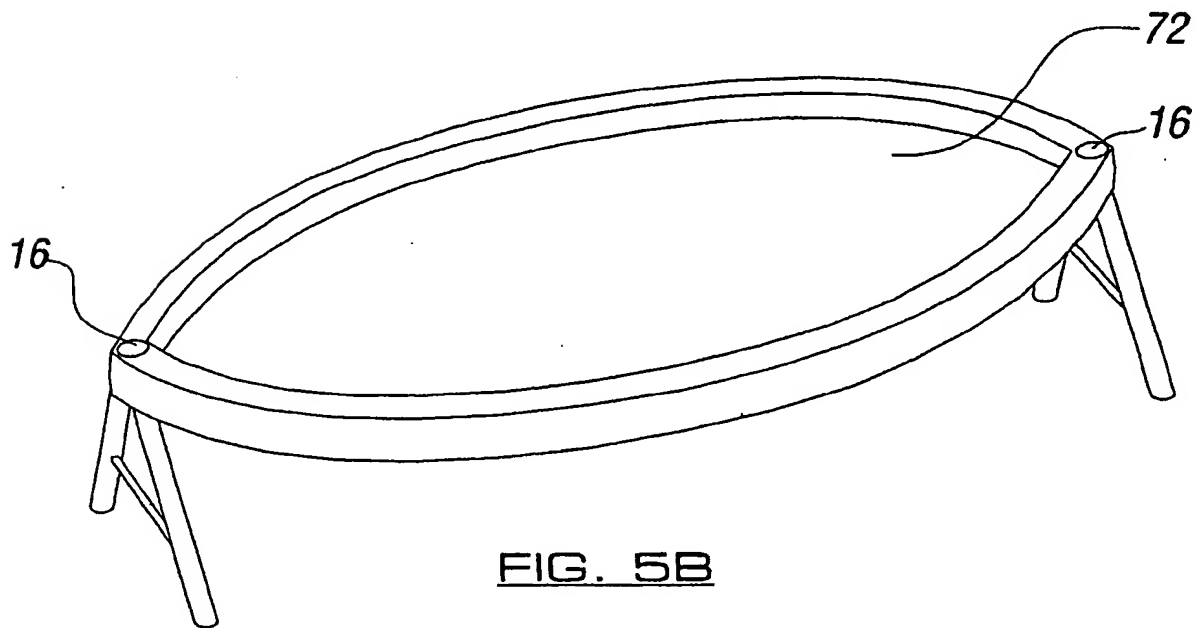
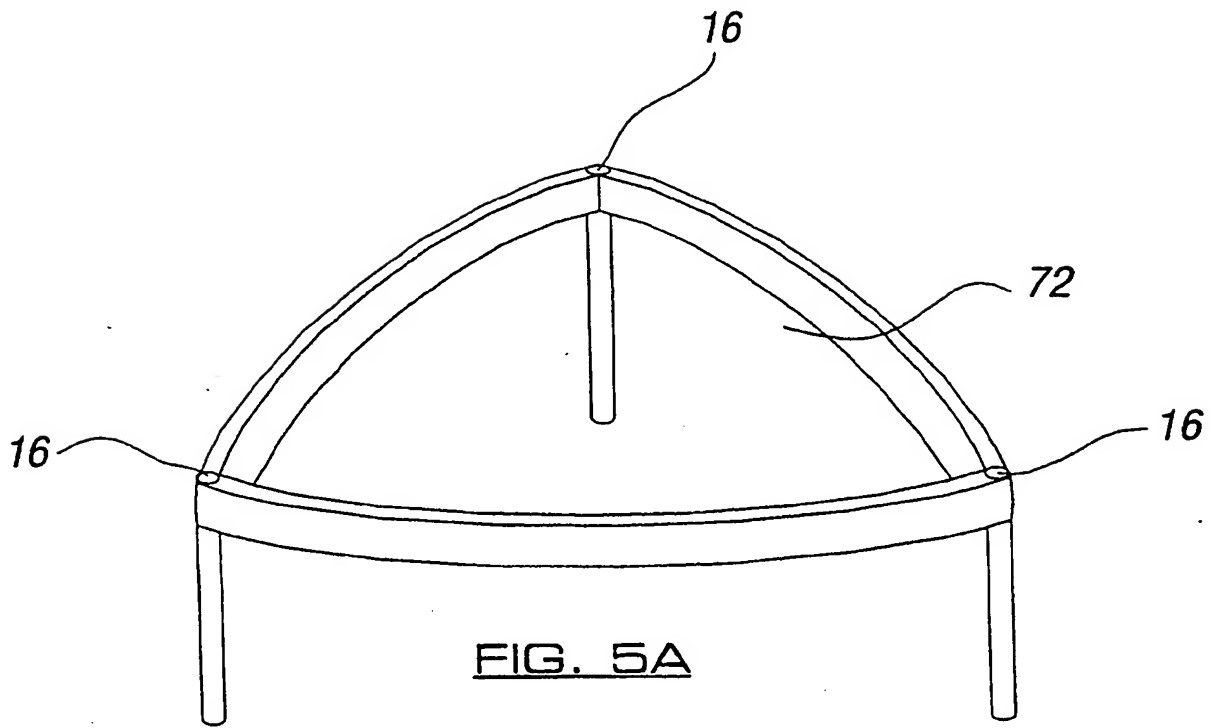


FIG. 3G





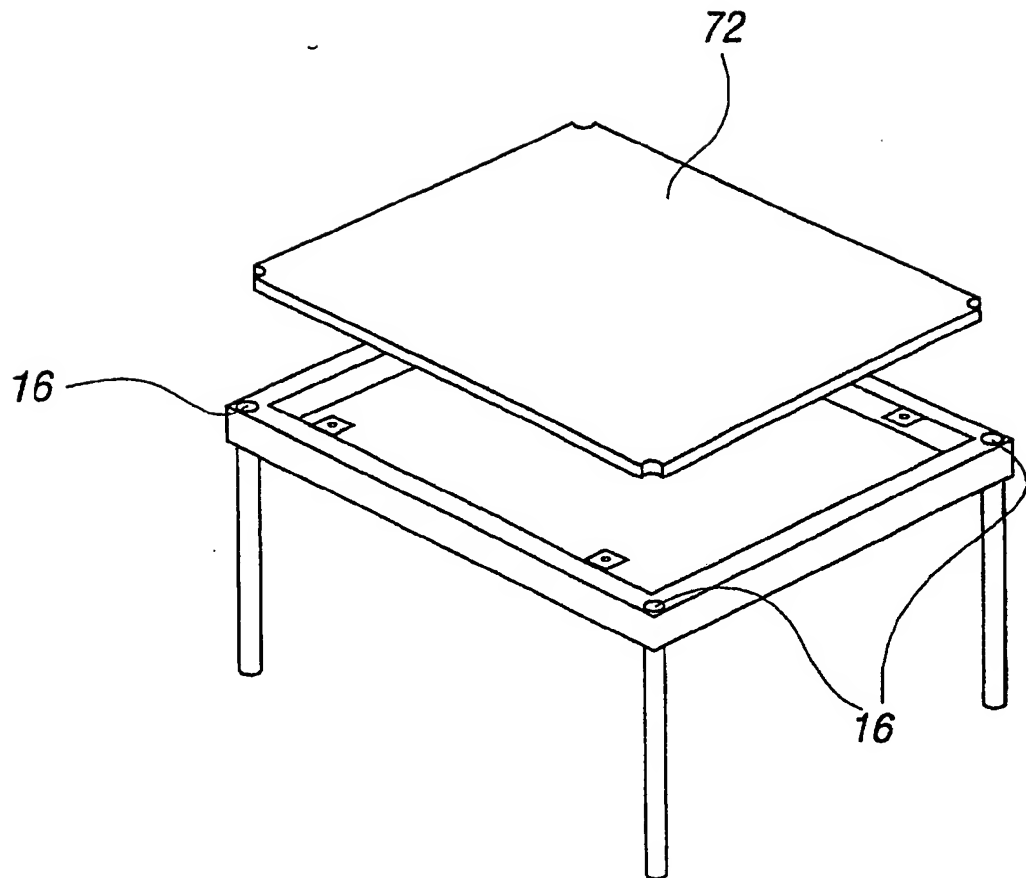


FIG. 5C



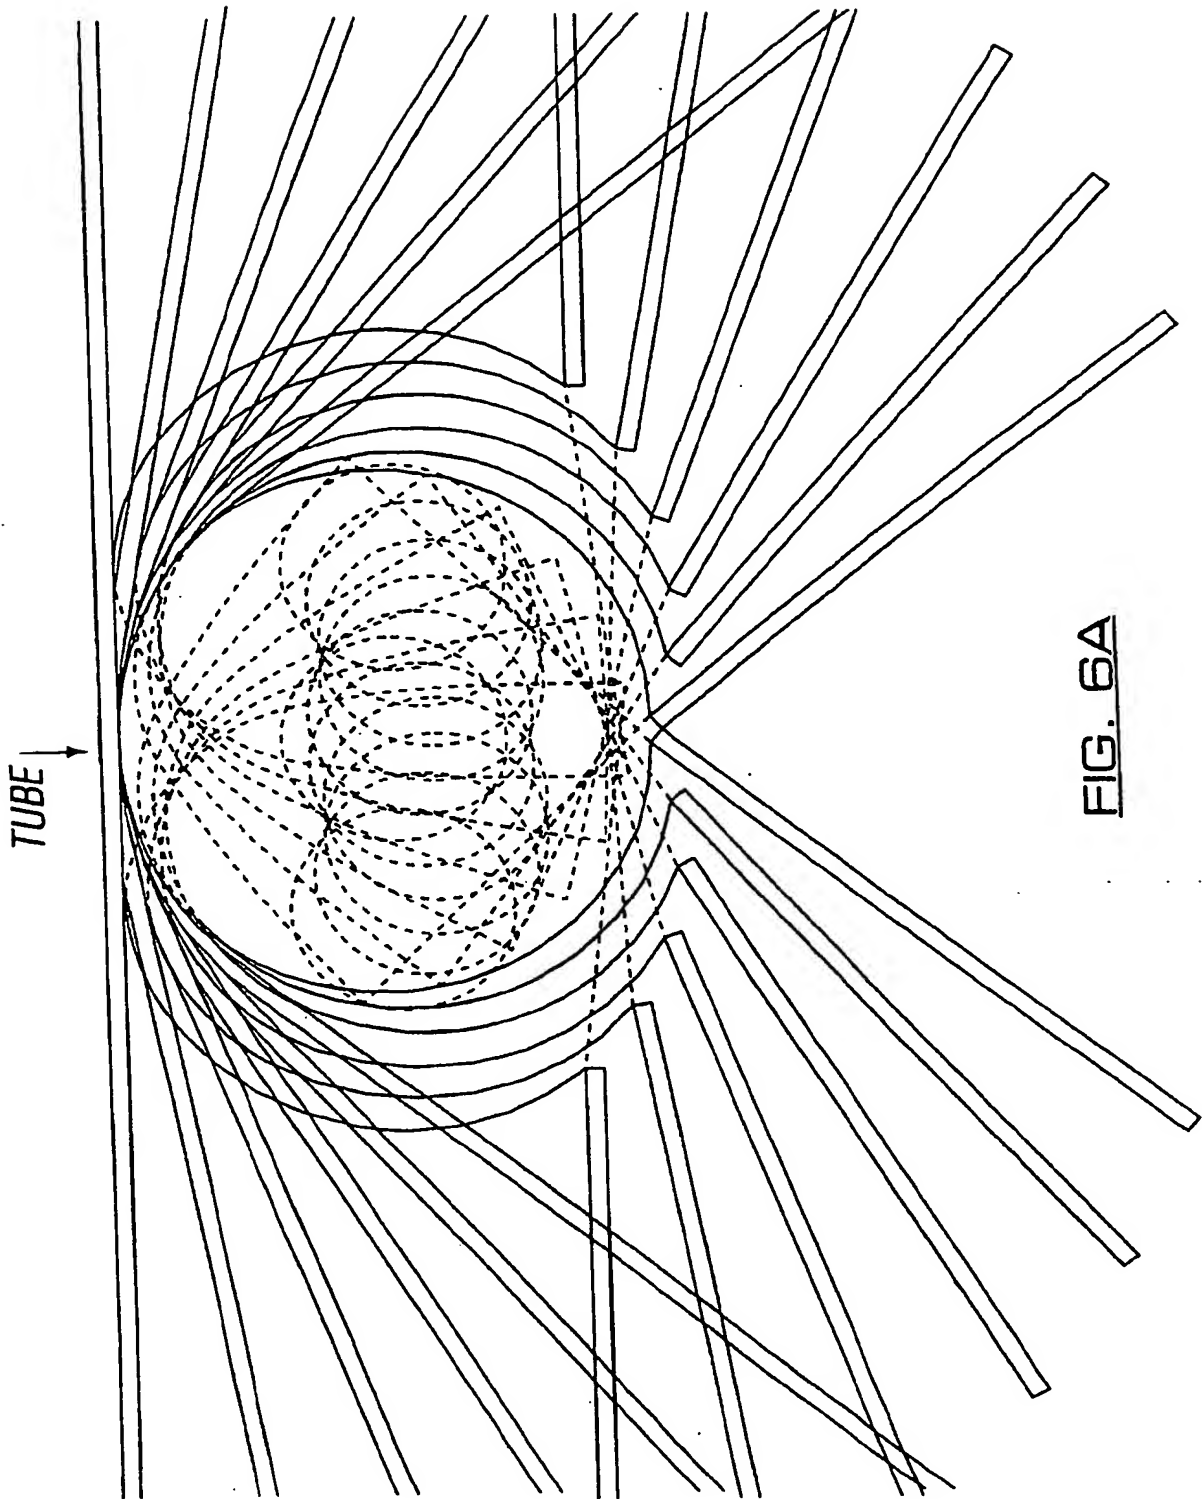


FIG. 6A

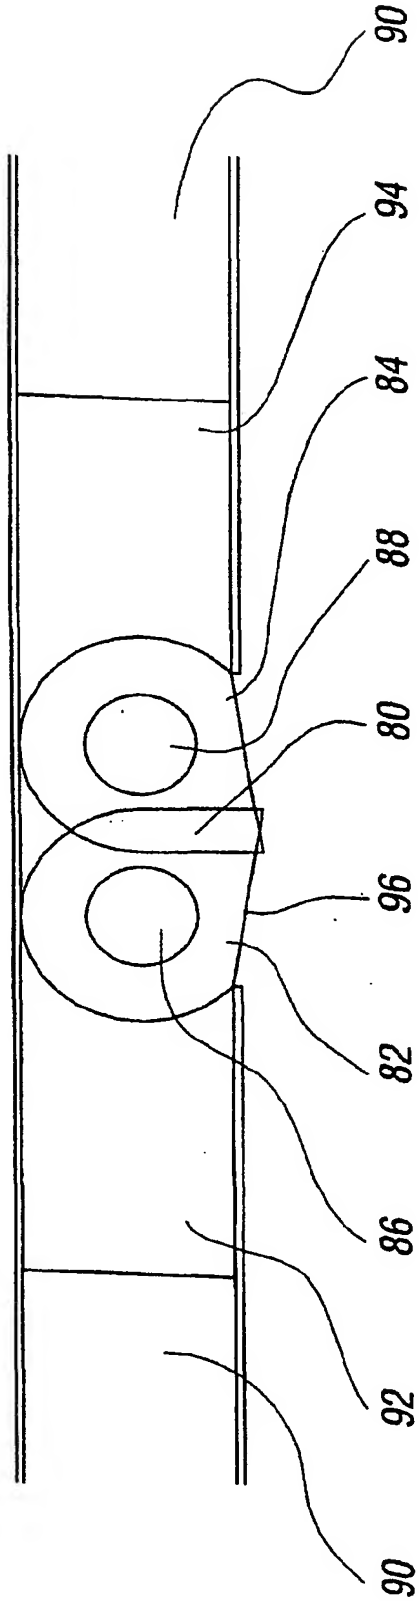


FIG. 6B

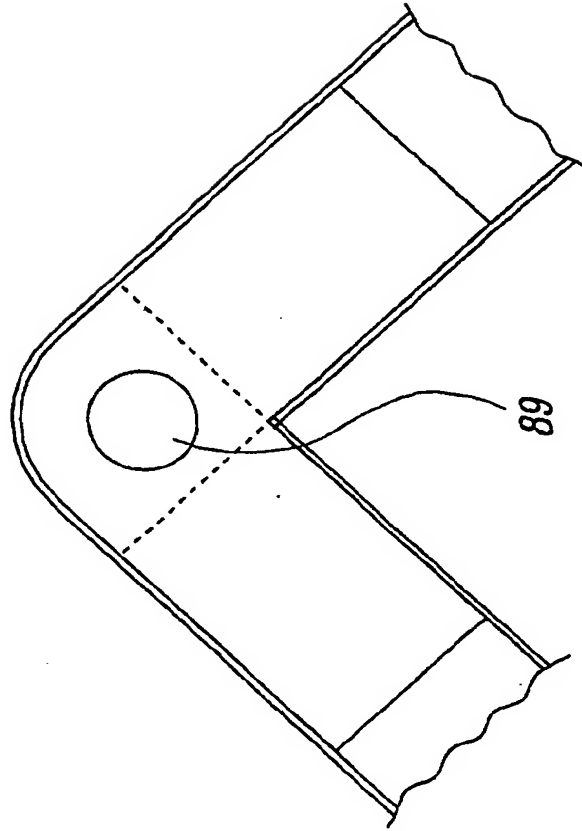
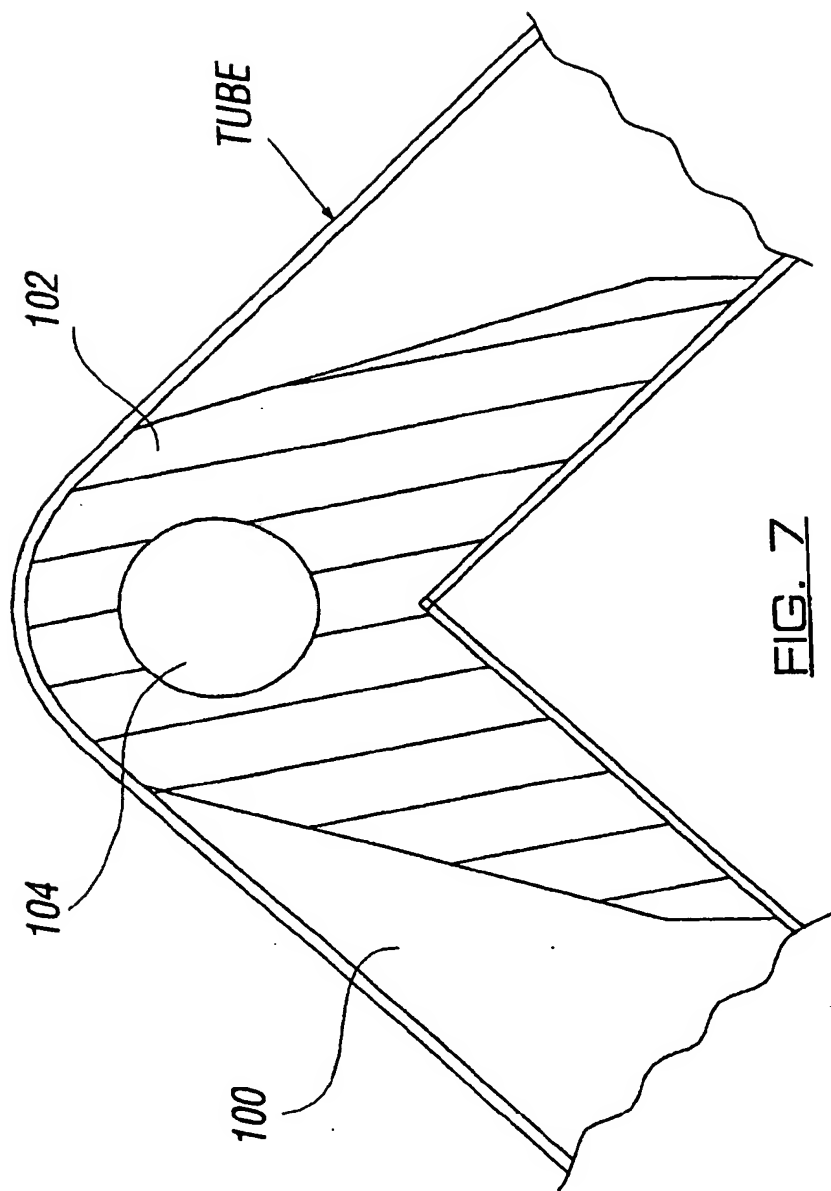


FIG. 6C




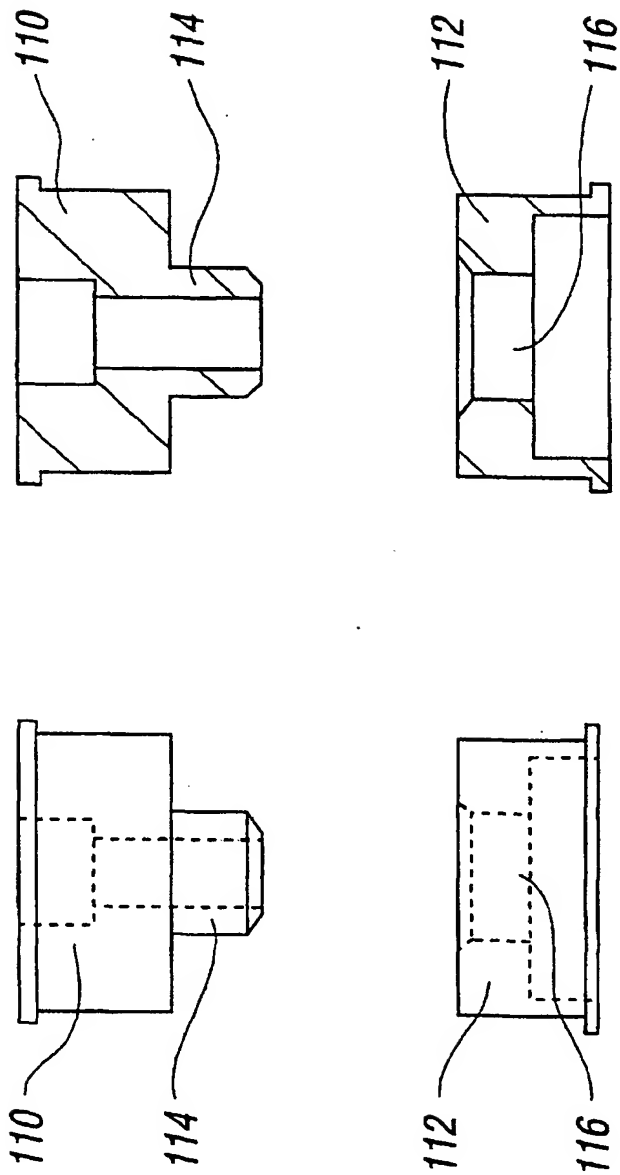


FIG. 8



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 160 465 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
12.12.2001 Bulletin 2001/50

(51) Int Cl.7: **F16B 17/00, F16B 7/04**

(43) Date of publication A2:  
05.12.2001 Bulletin 2001/49

(21) Application number: 01112695.0

(22) Date of filing: 25.05.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Johnson, Mark Nicholas**  
Tollerton, North Yorkshire YO61 2HB (GB)

(74) Representative: **Wood, Graham**  
**Bailey Walsh & Co,**  
5 York Place  
Leeds LS1 2SD (GB)


(30) Priority: 25.05.2000 GB 0012653

(71) Applicant: **Johnson, Mark Nicholas**  
Tollerton, North Yorkshire YO61 2HB (GB)

**(54) Mechanical joint, method for forming same and item incorporating same**

(57) The invention relates to the provision of a mechanical joint, a method for forming the same and items made incorporating the joint. The joint includes a first member (2) with an opening (6) which is in an initially sufficiently wide condition to receive therein a second member, insert (16) or former. When the same is positioned correctly the opening is moved to a condition

whereby the insert (16), second member or former is trapped in the opening (6). By this method the second and first members are connected either directly or via connection to the insert or former. Items including a plurality of said joints at the required locations can be made which are strong and sturdy and with relatively straightforward manufacturing requirements.

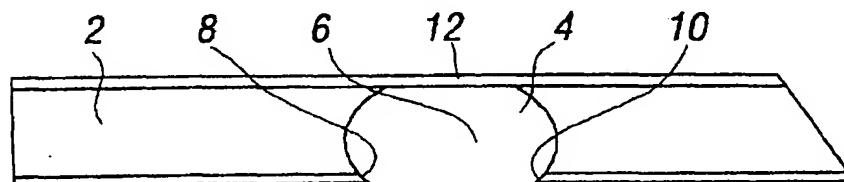

**FIG. 1A**

**EP 1 160 465 A3**

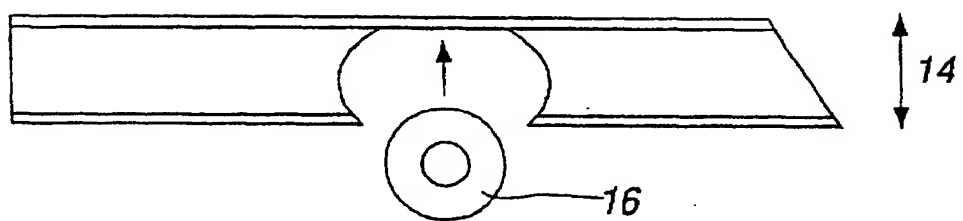


FIG. 1B



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 11 2695

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	CH 689 838 A (GROSSNIKLAUS HANS) 15 December 1999 (1999-12-15) * column 4, line 25 - column 5, line 41 * * column 7, line 11 - line 18; figures 1A-3C, 7 *	1-5, 7-17	F16B17/00 F16B7/04
X	EP 0 095 336 A (JOINT TECHNOLOGY LTD) 30 November 1983 (1983-11-30) * claims 7,9; figures 1-7 *	1,3,4,9, 10,12, 14-16	
X	US 2 760 799 A (SMITH ALVA T) 28 August 1956 (1956-08-28) * column 1, line 27 - column 2, line 3; figures 1-3 *	1,3,5,6, 9,12,15, 16	
X	US 1 288 706 A (SHANAHAN ET AL.) 24 December 1918 (1918-12-24) * claim 1; figures 1-6 *	1,3, 9-12,15, 16	
A	US 6 035 516 A (PETERSEN HORST UDO) 14 March 2000 (2000-03-14) * figures 2,5 *	6	TECHNICAL FIELDS SEARCHED (Int.Cl.7) F16B F16D
A	US 4 440 519 A (PENNEL JEAN-FRANCOIS ET AL) 3 April 1984 (1984-04-03) * column 5, line 35 - line 54 * * column 6, line 61 - column 7, line 11; figures 1-10 *	13	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18 October 2001	Examiner Martin, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 2695

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-10-2001

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
CH 689838	A	15-12-1999	CH	689838 A5	15-12-1999
EP 0095336	A	30-11-1983	AT	29165 T	15-09-1987
			AU	1489183 A	24-11-1983
			CA	1203404 A1	22-04-1986
			DE	3373203 D1	01-10-1987
			EP	0095336 A1	30-11-1983
			US	4631797 A	30-12-1986
US 2760799	A	28-08-1956	NONE		
US 1288706	A		NONE		
US 6035516	A	14-03-2000	GB	2324490 A ,B	28-10-1998
US 4440519	A	03-04-1984	FR	2458329 A1	02-01-1981
			BE	896991 A7	07-12-1983
			CA	1154480 A1	27-09-1983
			US	4512176 A	23-04-1985

EPC: COTM: P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**